




**Bonding Innovation to  
Every Layer of Construction**



**Innovative Tile & Stone Installation  
Products by Shree Bajrang Industries**

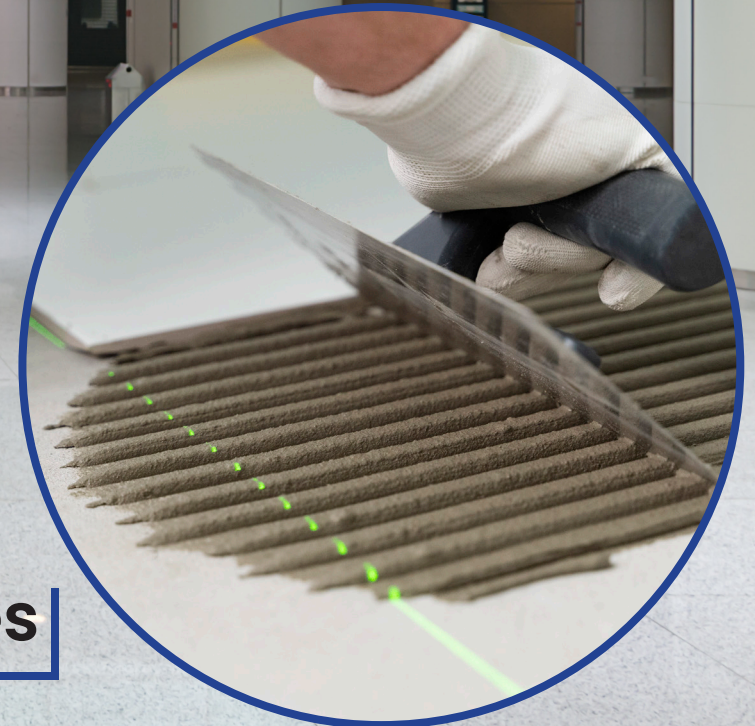



# Pioneering Smarter Construction

At Shree Bajrang Industries, we are revolutionizing the tile and stone installation industry with TileFit, our range of advanced, high-performance adhesives, grouts, and surface care solutions.

With decades of experience, rigorous R&D, and trained professionals, we bring durable, easy-to-apply, and innovative solutions to every kind of project, from residential to industrial scale.



10+ Years  
Industry Experience



10,000+  
Satisfied Customers



30+  
Specialized Products





# OUR PRODUCT RANGE OVERVIEW

Complete Installation & Surface Care Solutions

**One Brand.  
Multiple Solutions.  
Superior Performance.**



## The Product Range:

- Tile Adhesives (Interior/Exterior)
- Grouts - Cementitious
- Grout - Admixtures
- Epoxy Grouts
- PU Adhesive
- Tile & Stone Cleaners
- Installation Tools



**Tilefit**

**TF 015**

## Floor and Wall Tile Adhesive

An advanced polymer-based adhesive, ideal for installing ceramic tiles and tiles upto 2x4 ft size on interior dry floors and walls. It provides excellent hold, specially for vertical applications up to 3 meters.

## Features & Benefits

- Single-component formulation; requires only the addition of water
- Polymer-based adhesive suitable for interior applications
- Economical, efficient, and easy to use
- Strong adhesion to a wide range of substrates
- Exceeds shear bond strength requirements as per ANSI A118.1T
- Complies with EN/ISO standards with a C2T classification
- Exceeds IS 15477:2019 – Type 1T adhesive standards

## Application

- Specifically formulated for dry area applications on interior floors and walls of sizes up to 2x4 ft and 32x64 in
- Also recommended for interior wall tiles up to 2x4 ft
- Suitable for installing all types of ceramic tiles and small-format natural stones over concrete and other cement-based substrates

## Substrates Compatibility

- Tile on tile
- Concrete Masonry
- Brick Masonry
- Cement Mortar Beds
- Cement Terrazzo
- Cement Plaster
- Existing Natural Stone\*
- Marble Stone

## Product Details

- Color: Grey / white
- Packaging: 20 kg
- Shelf life: 12 Months

## Compliance Standards

- IS 15477 : 2019
- Type 1-C2T
- EN 12004

Application:  
Floor 2x4, 32x64  
Wall upto 2x4

\*Surface must be properly cleaned and roughened before installation of tiles or stones.





## Tilefit Fiber Power

## TF 027

### High-Strength Polymer & Fiber-Modified Tile Adhesive

A high-performance, polymer and fiber-modified adhesive suitable for a wide range of tile installations, including tile-over-tile applications. Ideal for walls, floors, and wet areas such as bathrooms and kitchens, specially for vertical applications upto 10 meters

### Features & Benefits

- Single-Component Formulation: Just add water; easy to mix and apply
- Fiber Reinforced: Enhanced bond strength and flexibility
- Multi-Surface Compatibility: Suitable for various substrates including existing tiles
- Economical & Efficient: Cost-effective and simple to use
- Wet Area Ready: Designed for high-moisture areas like bathrooms
- Vertical & Horizontal Use: Suitable for both walls and floors

### Application

- Specifically formulated for dry area applications on interior and exterior floor tiles up to 6x4 ft
- Also suitable for interior wall tiles up to 32x64
- Suitable for installing all types of ceramic tiles and small-format natural stones over concrete and other cement-based substrates

### Substrates Compatibility

- Concrete
- Ceramic Tile
- Cement Mortar Beds
- Natural Stone
- Concrete Masonry Units (CMU)

Application:  
Floor 6x4  
Wall Interior  
upto 32x64

### Product Details

- Packaging: 20 kg and 40 kg bags for project use only
- Color: Grey / White
- Shelf life: 12 Months

### Compliance Standards

- IS 15477:2019
- Type 2
- C2TE
- EN 12004





## Tilefit Fiber & Gel Power

**TF 036**

Imported High-Polymer Modified Tile Adhesive:

A flexible, fiber and gel-enhanced polymer adhesive designed for demanding applications. Ideal for large format tiles, areas with thermal movement, and external wall installations.

### Features & Benefits

- High Flexibility: Handles substrate movement without losing adhesion
- Anti-Sag & Slump: Excellent for vertical installations; clean and efficient application
- Wide Use Case: Performs well in both interior and exterior settings
- High Coverage: Offers excellent coverage, making it cost-efficient

### Application

- Recommended for interior wall tiles upto 8x4 ft
- Also suitable for exterior wall tiles of size 2x4 ft, upto a height of 25-30 ft

### Substrates Compatibility

- Concrete
- Cement Plaster
- Cement Mortar Beds
- Precast Concrete
- Concrete Masonry Units (CMU)
- VDF (Vaccum Dewatered Flooring)

### Product Details

- Packaging: 20 kg
- Color: Grey
- Shelf life: 12 Months

### Compliance Standards

- IS 15477:2019
- Type 3
- C2TE
- EN 12004

Wall Interior 8x4  
Exterior 2x4  
upto 25-30 feet





## Tilefit Super Tilefit

TF 048

OPA Gel Power & Fiber Polymer-Modified Adhesive

A premium-grade, imported tile adhesive designed for large format tiles, glass mosaics, and natural stones in both dry and submerged areas. Ideal for high-rise applications and extreme conditions.

### Features & Benefits

- Single-Component: Just add water, mix, and apply
- All-Weather Performance: Performs in a wide range of environmental conditions
- Super Bonding Strength: Ideal for exterior walls and submerged conditions like pools
- Flexible & Durable: Maintains bond in thermal and moisture-affected zones

### Application

- Designed for fixing interior and exterior wall tiles (Tile size: 600x600 ft, 800x800 ft & 1200x1200 ft)
- Adhesive for any size & any height

### Substrates Compatibility

- Concrete
- Ceramic Tile
- Cement Mortar Beds
- Cement Plaster
- Concrete Masonry Units (CMU)

### Product Details

- Packaging: 20 kg
- Color: Grey / White
- Shelf life: 12 Months

### Compliance Standards

- IS 15477:2019
- Type 4
- C2TES1
- EN 12004

Application:  
Fixing interior  
and exterior  
wall tiles





## Tilefit Super Stone Fit Adhesive

**TF 055**

### Premium S2 Flexible Tile & Stone Adhesive

A high-deformation adhesive formulated for vitrified tiles, natural stones, and demanding surfaces. Built to withstand structural movement and wet conditions in both interior and exterior environments.

### Features & Benefits

- Highly Deformable: C2TES2 compliant for tough and flexible installations
- For Large Format Slabs: Supports tiles /slabs larger than 1200 x 1200 mm
- Application Thickness: Can be applied up to 15 mm
- Shock-Resistant: Excellent tensile strength and flexibility
- Water & Heat Resistant: Works with heated screeds and in wet areas

### Application

- For natural stone, granites, glass mosaics & tile slabs
- Specifically formulated for fixing natural stone and modified stone tiles, particularly for elevation applications

### Substrates Compatibility

- Concrete
- Ceramic Tile
- Cement Mortar Beds
- Cement Plaster
- Concrete Masonry Units (CMU)

### Product Details

- Packaging: 20 kg
- Color: Grey / White
- Shelf life: 12 Months

### Compliance Standards

- IS 15477:2019
- Type 4
- C2TES2
- EN 12004

Application:  
For Natural  
Stones

# Tilefit Epoxy Grout TF100



## Tilefit Epoxy Grout

TF 100

High-Performance, Hygienic Grout for Demanding Environments

Tilefit TF-100 is a premium, stain-free, epoxy-based grout formulated for intensive-use spaces. It offers unmatched chemical resistance, hygiene, and long-lasting aesthetics—ideal for interior and covered exterior wall and floor joints where cleanliness, durability, and performance are non-negotiable.

### Features & Benefits

- Stain-Free & Colour-Fast
- Chemical & Temperature Resistant
- Non-Cracking & Non-Powdering
- Anti-Bacterial & Anti-Fungal: Prevents microbial growth for enhanced hygiene
- Water & Shock Resistant: Resilient against moisture and mechanical impact
- Food-Grade Certified: Safe for use in food processing and hygienic areas

### Application

- Ideal for both commercial and residential projects, including:  
Commercial Kitchens & Cafeterias
- Swimming Pools, Saunas, and Other Wet Areas
- Schools, Restrooms, and Healthcare Facilities
- Suitable for tile and stone joints from 2 mm onwards to 12 mm

### Technical Information

- Working Temperature Range: 16°C to 32°C
- Stain Resistance: Effective against common food spills and household chemicals
- Not Recommended For: Soft, polished marble or sensitive glazed tile finishes

### Product Details

- Packaging: 1 kg & 5 kg
- Color: Uniform Colors
- Shelf life: 12 Months

Ideal for pools, bathrooms & kitchens



# Tilefit PU Adhesive TF 101



## Tilefit PU Adhesive

## TF 101

Tilefit PU Adhesive TF 101 is a premium, two component non-sag polyurethane adhesive formulated for superior bonding of ceramic, vitrified, semi-vitreous, and glass mosaic tiles, as well as natural and engineered stones on any substrates. Designed for both interior and exterior environments, it offers outstanding flexibility, thermal shock resistance, and chemical durability across a wide variety of substrates.

### Features & Benefits

- High Bond Strength:
- Non-Sag Formulation
- Excellent Flexibility
- Water & Chemical Resistant
- Low VOC Content
- Wide Substrate Compatibility

### Compliance Standards

- EN 12004 / ISO 13007: R2T
- IS 15477:2019: Type 5 T
- VOC: Very Low

Ideal for wood  
plywood, metal  
& gypsum board

### Application Scope

- Interior and exterior floor & wall installations
- Wet and dry zones including kitchens, bathrooms, balconies, and facades
- Commercial, residential, and industrial tiling projects
- Suitable for both horizontal and vertical applications

### Substrates Compatibility

- Ceramic and Vitrified Tiles
- Glass Mosaic Tiles
- Granite and Marble
- Engineered Stones (Agglomerates)
- Precast Terrazzo
- Wood & plywood
- Metal Floor & walls
- Gypsum boards

### Product Details

- Color: Off White
- Pack Sizes: 4 kg (Part A: 3.6 Kg | Part B: 400 g)
- Coverage: Approx. 15–17 sq. ft. per 4 kg with a 3 mm bed using V-notch trowel
- Shelf Life: 12 months (in original, unopened packaging stored in cool, dry conditions)

# Tilefit Grout TF 201



## Tilefit Grout

TF 201

Polymer-Enhanced Cement Grout for Fine Joints (1–3 mm)

Tilefit Grout is a premium, polymer-modified, un-sanded cement grout designed for interior and exterior applications on floors and walls. Engineered for joint widths ranging from 1 mm to 3 mm, it delivers long-lasting durability, aesthetic consistency, and easy maintenance.

### Features & Benefits

- Weather Resistant: Suitable for both indoor and outdoor applications
- Colour Fastness: Maintains uniform appearance over time
- Easy Application & Clean-Up: Smooth workability and minimal residue
- Non-Cracking & Non-Shrinking: Reduces structural stress and cracking
- Water & Shock Resistant: Ensures durability under demanding use

### Application Scope

- Ideal for commercial, residential, and institutional use on walls and floors.
- Recommended for joint widths between 1 mm and 3 mm. Suitable across a wide range of tile types and stone finishes.

### Substrates Compatibility

- Ceramic Tiles
- Vitrified Tiles
- Glass Mosaic Tiles
- Granite Marble
- Engineered Stones (Agglomerates)
- Precast Terrazzo
- Bricks

### Product Details

- Packaging: 1 kg
- Color: uniform colours
- Shelf life: 12 Months

Ideal for  
use on walls  
& floors



# Tilefit Grout Admix TF 202



## Application

- Interior and dry zones
- Wet areas such as bathrooms, kitchens, and utility rooms
- Shower enclosures
- Residential and commercial flooring
- Suitable for both walls and floors

## Grout Admixture

**TF 202**

### Performance Enhancer for Cementitious Grouts

Tilefit Grout Admix is a high-performance, polymer-based liquid additive formulated to upgrade the durability, flexibility, and resistance of standard cement grouts. Specially designed for challenging environments such as wet zones and high-traffic areas, it transforms regular grout into a superior, long-lasting solution.

### Features & Benefits

- Enhanced Colour Consistency: Improves pigment dispersion and long-term colour stability
- Increased Flexibility & Compressive Strength: Withstands structural stress and substrate movement
- Water, Chemical & Shock Resistance: Ideal for moisture-prone and heavy-duty areas
- Lower Water Absorption: Extends grout life and prevents microbial growth
- Easy Maintenance: Makes grout joints easier to clean and reduces dirt retention

## Installation Method

Mixing Ratio: Blend Tilefit Grout Admix with Tilefit Cement Grout in recommended proportions  
Mixing Technique: Stir thoroughly by hand or with a slow-speed mixer to a smooth, lump-free consistency

## Product Details

- Color: White
- Pack Sizes: 100 ml, 400 ml, 5 Litre, 20 Litre
- Shelf Life: 12 months (in sealed containers, stored in a cool, dry place)

Ideal for increasing the grout strength

# Tilefit Tile & Stone Cleaner TF 205



## Substrates Compatibility

- Ceramic Tiles
- Vitrified Tiles
- Natural Stone
- Concrete Surfaces Masonry

## Tilefit Tile & Stone Cleaner

**TF 205**

Heavy-Duty Tile & Surface Restorer Powerful Surface Cleaning for Tile & Stone Installations Tilefit Tile Cleaner is a high-performance, acidic cleaning solution formulated to remove tough stains, grout haze, adhesive residues, hard water marks, and construction debris from tile and stone surfaces. Designed for both interior and exterior use, it restores surfaces to their original finish without damaging the substrate.

## Features & Benefits

- Fast-Acting Formula: Delivers quick and effective results
- Non-Corrosive: Safe for use on approved surface when used as directed
- User-Friendly: Simple to apply, rinse, and clean
- Cost-Effective: High cleaning efficiency with minimal product usage

## Product Details


- Packaging: 1 Litre bottle
- Color: Pink
- Shelf Life: 12 months (in sealed packaging, stored in a cool, dry place)

Ideal for  
tiles & natural  
stone cleaning





## Tools

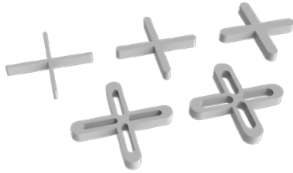

### Tile Spacers

Essential for maintaining consistent gaps between tiles during installation. They ensure straight grout lines and a professional, uniform finish on floors and walls.



### Tile Leveling Clip & Wedge System

Prevents tile lippage and keeps tiles level throughout the installation process. Clips and wedges work together to hold tiles in place until the adhesive sets.



### Tile Leveling Plier

Used to tighten the leveling wedge into the clip with controlled pressure. Ensures a perfectly flat tile surface by aligning edges seamlessly.



### Notched Trowel

Ideal for applying tile adhesive evenly with the right thickness. Its notched edges create ridges that enhance the bond between tile and substrate.



### Tile Suction Lifter

Allows safe and easy lifting and positioning of large tiles or slabs. Provides a firm grip, reducing the risk of breakage or misalignment during installation.

**Designed for Professionals.  
Trusted by Experts. Quality.  
Strength. Reliability.**



## **WHY CHOOSE TILEFIT?**

TileFit products are engineered for today's evolving construction needs. From large-scale infrastructure to fine interiors, our products are trusted for their superior performance and ease of use.

## **Why TileFit?**

- Easy-to-apply, reliable formulations
- Certified manufacturing and testing
- India-wide availability
- Full technical and installation support





# TileFit: Bonding Innovation to Every Layer of Construction

## Contact Us:

Shree Bajrang Industries:

Customer Care: 1800 8913 963

Email: [shreebajrangindustries1987@gmail.com](mailto:shreebajrangindustries1987@gmail.com)

[www.sbiadhesive.com](http://www.sbiadhesive.com)

